


**SPECIFICATION :**

**1. Electrical Char.**

Insulation Resistance : 500M-Ohm Min.  
 Contact Resistance : 20milli-Ohm Max.  
 Rating Current : 1.5A Max.  
 Rating Voltage : 120V AC  
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

**2. Physical char.**

Housing : PBT Glass Filled (UL 94V-0)  
 Color : Black Color  
 Spring Wire : 0.45mm Dia. Phosphor Bronze  
 Gold Plating Over Nickel  
 Temperature Range : - 25 /+90 Deg C  
 Durability : 500 Mating cycles Min.

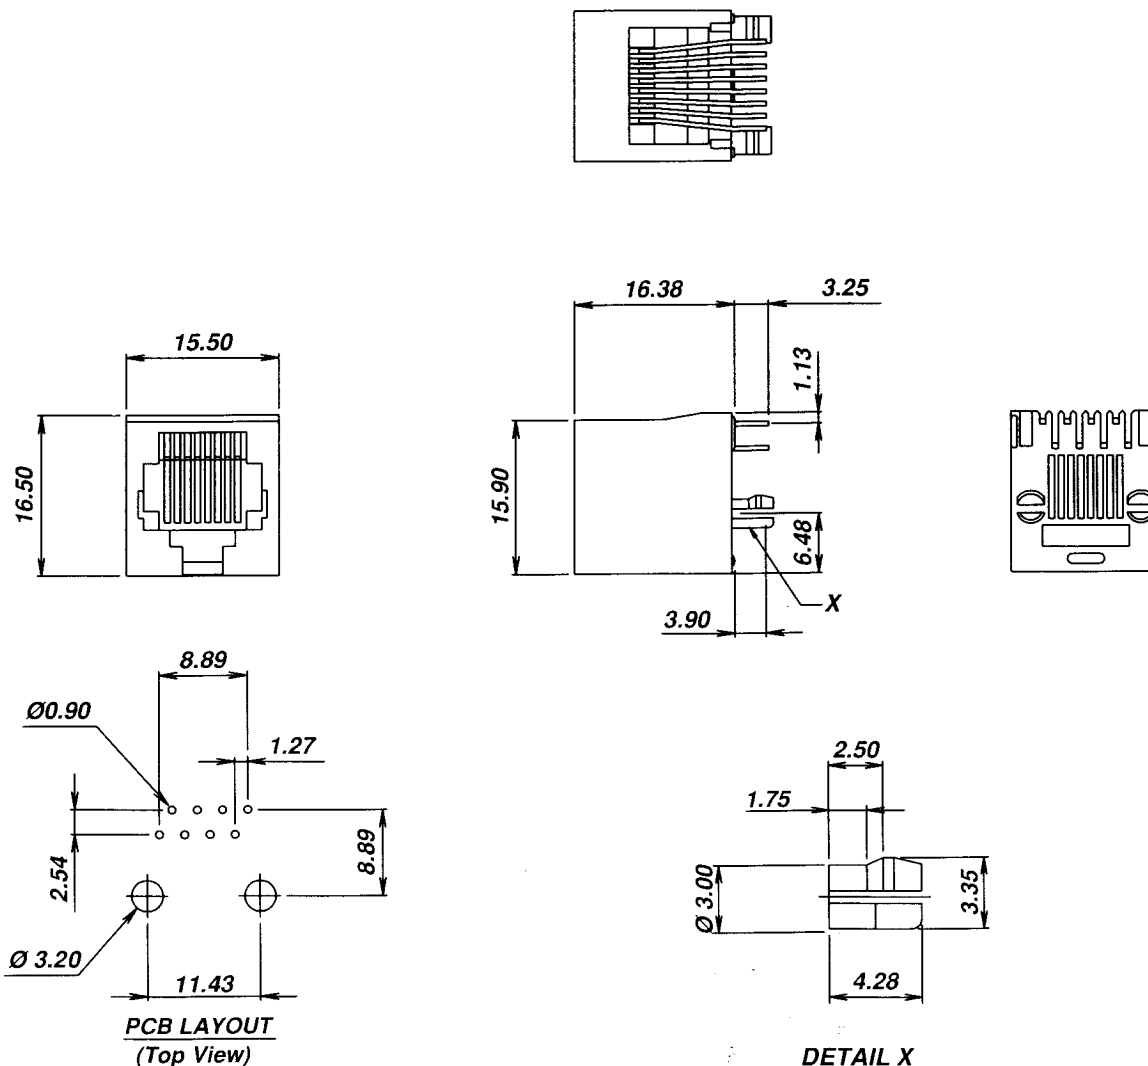

**AJ-012-8-F-X-N** ← **FLANGELESS**

F=8p8c  
 Gold plated 1=15u, 2=30u, 3=50u, 4= 6 u

**ALLSUN CORPORATION**  
 9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.  
 E - mail Address : allsun @ globalsources. com

**TITLE**  
**RJ45 SIDE ENTRY PCB JACK**  
 UL & cUL FILE NO. E131820  
**MODULAR JACKS ASSY FOR**  
**AJ-012-8-F-X-N**  
 SCALE SIZE DWG. NO. 9628 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Steven	DATE MAY-19 '05
THIRD ANGLE PROJECTION	LINEAR	MM INCH	00±0.01 000±0.005 0000±0.002	CK'D Johnn	MAY-19 '05
	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D Billy	MAY-19 '05

DWG. NO. **AS012007**