



SPECIFICATION :




1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

- Housing : PBT Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.45mm Dia. Phosphor bronze
Gold Plating Over Nickel
- Temperature Range : - 25 /+90 Deg C
- Durability : 500 Mating cycles Min.

AJ-019-9-F-X

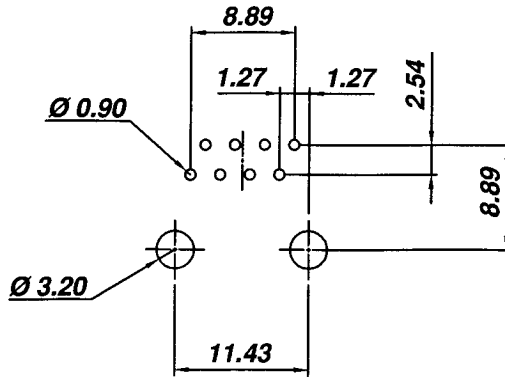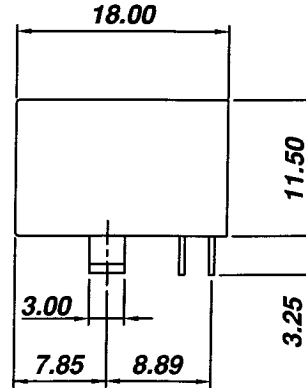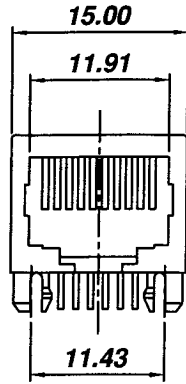

PCB LAYOUT
(Top View)



ALLSUN CORPORATION
 9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.
 E - mail Address : allsun@globalsources.com

TITLE
**VERY LOW PROFILE SIDE ENTRY PCB JACK
 UL & cUL FILE NO. E131820**

**MODULAR JACKS ASSY FOR
 AJ-019-9-F-X**

SCALE SIZE DWG. NO. 9698 SERIES

| NOT SCALED DRAWING | TOLERANCE UNLESS OTHERWISE NOTICE | INCH | MM | DR. | DATE |
|----------------------------|-----------------------------------|------------------------------------|----------------------------------|--------|------------|
| THIRD ANGLE PROJECTION | LINEAR | 00±0.01 000±0.005 0000±0.002 | 00±0.25 000±0.13 0000±0.05 | Steven | JAN-12 '05 |
| | MM INCH | ANGLE +0°30' | RADIL | Johnn | JAN-12 '05 |
| MM INCH | | | | Billy | JAN-12 '05 |

DWG. NO. **AS019004**